
I-87064 Hardware User Guide Ver 1.0

Last Modified 05/16/2001

Specification

Relay Output Module		
Output Channel	8	
Contact Type	Form A: Normal Open	
Contact Rating	5A @250VAC 5A @30VDC	
Operate/Release Time	6mS/3mS max.	
Life	Mechanical : 2*10^7 min. Electrical : 10^5 min.	
Dielectric Strength	Between open contacts : 750VAC Between coil and contacts : 2000VAC	
Surge Strength	4000V	
LED Display	1 LED as Power indicator 8 LEDs as DO indicators	
Power Consumption	Typical: 0.5W Max. : 1.7W	

I-87064 Wire Connection

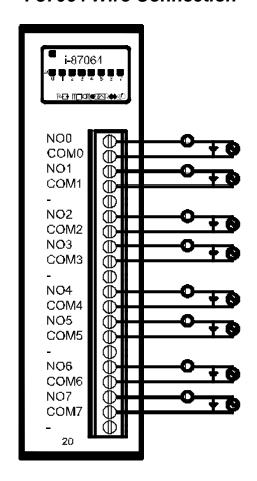

I-87064 Wire Connection Type

Output Type	ON State LED ON Readback as 1	OFF State LED OFF Readback as 0
Relay Contact	ACDC COMX	ACD X COMx

I-87064 Internal I/O Structure

