




BACnet Series Products



BACnet/IP to Modbus TCP Gateway



GW-5493

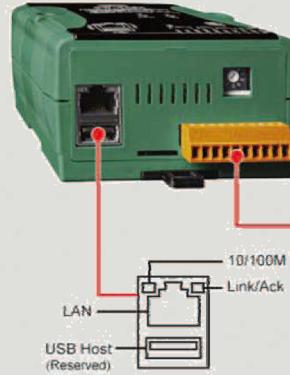

RxD	COM1	(10)
TxD	COM2	
GND	COM3	
Data+	COM4	
Data-	COM5	
RxD	COM6	
TxD	COM7	
+VS	COM8	
GND	COM9	
F.G.	COM10	

Pin Assignment

GW-5493 is a fully configurable universal BACnet/IP (Server) to Modbus TCP (Client) gateway which is used to make Modbus TCP devices accessible on a BACnet network. The GW-5493 contains a large number of BACnet objects (AI, AO, AV, BI, BO, BV, MSI, MSO, MSV) gives you flexibility in mapping Modbus TCP registers to any combination of BACnet objects. Multiple BIBBs (DS-RP-B, DS-RPM-B, DS-WP-B, DS-WPM, DS-COV-B...etc.) are supported. All the data transfer is configurable using a standard Web browser.


Features

- Read/Write any standard Modbus register via BACnet
- Fully Compliant with BACnet/IP Server
- Fully User Configurable Modbus TCP Client
- Modbus register mapping configured via web interface

BACnet Support

Objects	Binary Input / Binary Output / Binary Value / Analog Input / Analog Output / Analog Value / Multi-state Input / Multi-state Output / Multi-state Value / Device
BIBBs	DS-RP-B, DS-RPM-B, DS-WP-B, DS-WPM-B, DS-COV-B, DM-DDB-B, DM-DOB-B, DM-DCC-B, DM-TS-B, DM-UTC-B, DM-RD-B

Utility Features

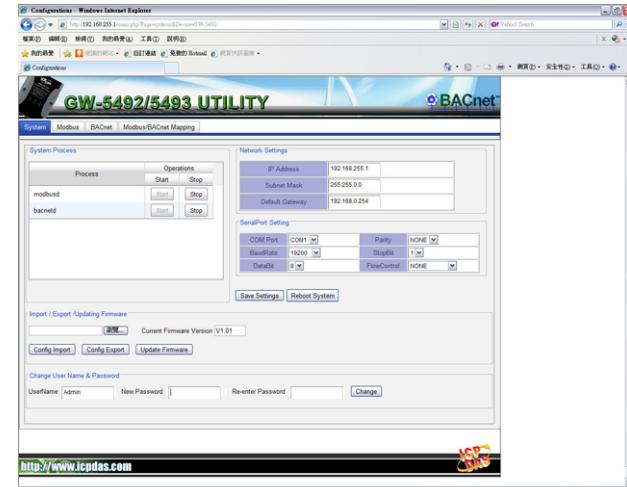

- Configured via standard web browser
- Provide Modbus network configuration interface
- Provide BACnet configuration interface


Modbus RTU Support

Function Code	0x01, 0x02, 0x03, 0x04, 0x05, 0x06, 0x10, 0x0F
------------------	---

Hardware Specifications

System	
CPU	32-bit
SDRAM	64 MB
Flash	64 MB
EEPROM	16 KB
Communication Ports	
COM1	RS-232 (Rx,D, Tx,D, and GND); Non-isolation
Ethernet	10/100Base-TX Ethernet Controller
Protocol	
Modbus	Modbus TCP Client
BACnet	BACnet/IP Server
BACnet Objects	BI, BO, BV, AI, AO, AV, MSI, MSO, MSV (Maximum: 200 each)
BIBBs	DS-RP-B, DS-RPM-B, DS-WP-B, DS-WPM-B, DS-COV-B, DM-DDB-B, DM-DOB-B, DM-DCC-B, DM-TS-B, DM-UTC-B, DM-RD-B
Mechanical	
Dimensions	91mm x 132mm x 52mm(W x L x H)
Installation	DIN-Rail
Environment	
Operating Temp.	-25 ~ +75 °C
Storage Temp.	-30 ~ +85 °C
Humidity	5 ~ 90% RH, non-condensing
Power	
Power Input Range	+10V to +30VDC
Isolation	1 kV
Consumption	4.8 W (0.2 A @ 24 VDC)

Applications

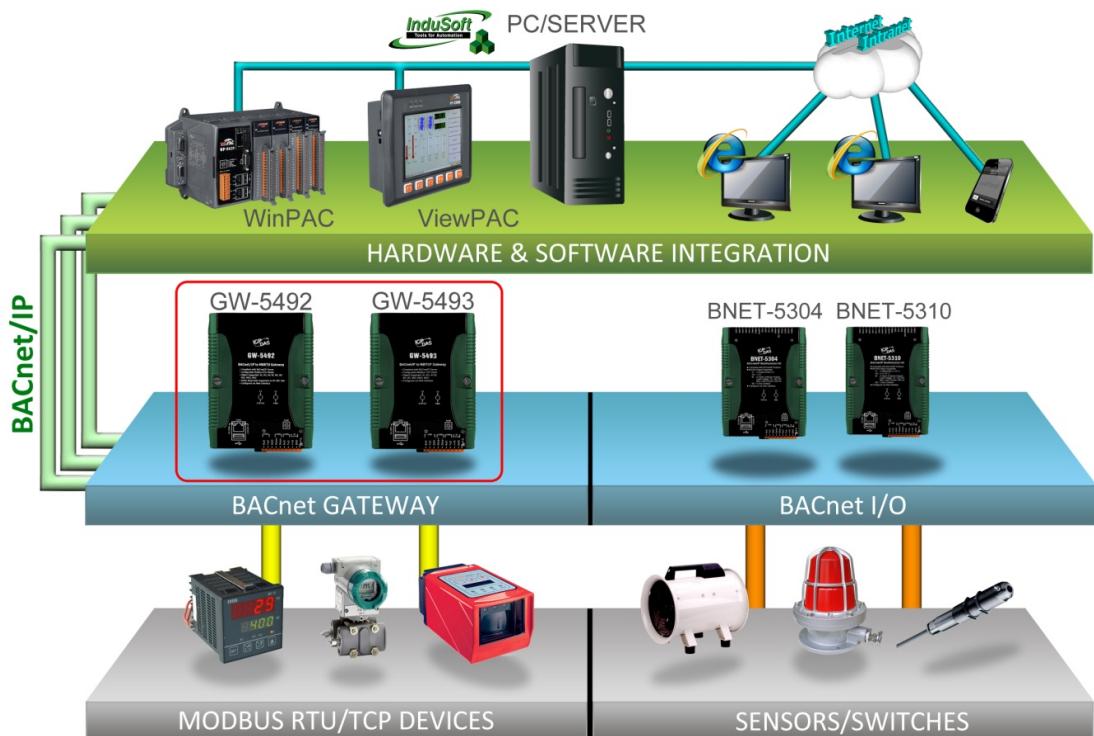

Ordering Information

GW-5493

BACnet/IP to Modbus TCP Gateway